

Announcing the industry's first 1000W battery workstation!

Unleash the power!

POWER you have been waiting for,
Safety you have come to expect in a **CELLPRO** product.


REV LECTRIX™



KEY FEATURES OF CELLPRO POWERLAB 8

- Charge, discharge, monitor, and perform multiple cycles
- Log and Graph all major operations when using free Charge Control Software (CGS)
- Support for all current and future battery chemistries
- Selectable charge rates range 10mA to 30A
- Selectable discharge rate range 10mA to 10A/30A (ext discharge)
- Charge power rating, 1008W @ +24VDC input voltage, 516W @ +12VDC input voltage
- Discharge power rating 100W (internal), 1000W (external regenerative), see illustration below
- Smart power management protects input supplies
- Node-only operation option available
- COMING SOON! Extend PL8's capacity to 2 batteries (2s-6s) with optional Smart Parallel Adapters

ENVIRONMENTALLY FRIENDLY REGENERATIVE DISCHARGE

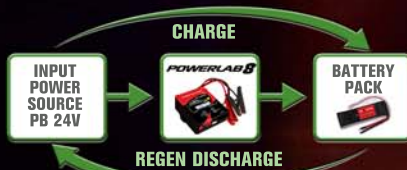

Stop wasting energy, put it back into your input battery



Cellpro
POWERLAB 8
1000W

Table showing \$/watt for various high-power chargers (min 200W max charge power)

CHARGER MODEL	\$/WATT
CELLPRO POWERLAB 8	\$.28 per watt
Icharger 1010b	\$.57 per watt
Icharger 208b	\$.57 per watt
Hyperion 720i	\$.79 per watt
Hyperion Duo III	\$.83 per watt
ThunderPower 1010C	\$.95 per watt
Bantam BC-8DX	\$1.13 per watt
Bantam 902	\$1.35 per watt
Shultz 7.36-8	\$2.28 per watt

* Numbers based on advertised price and maximum charge power at highest specified input voltage.

[Click here to see complete features list ▶](#)

[Click here to SHOP NOW ▶](#)



DESIGNED BY



www.fmadirect.com